

UV-BOX-E2/40H-NX-T

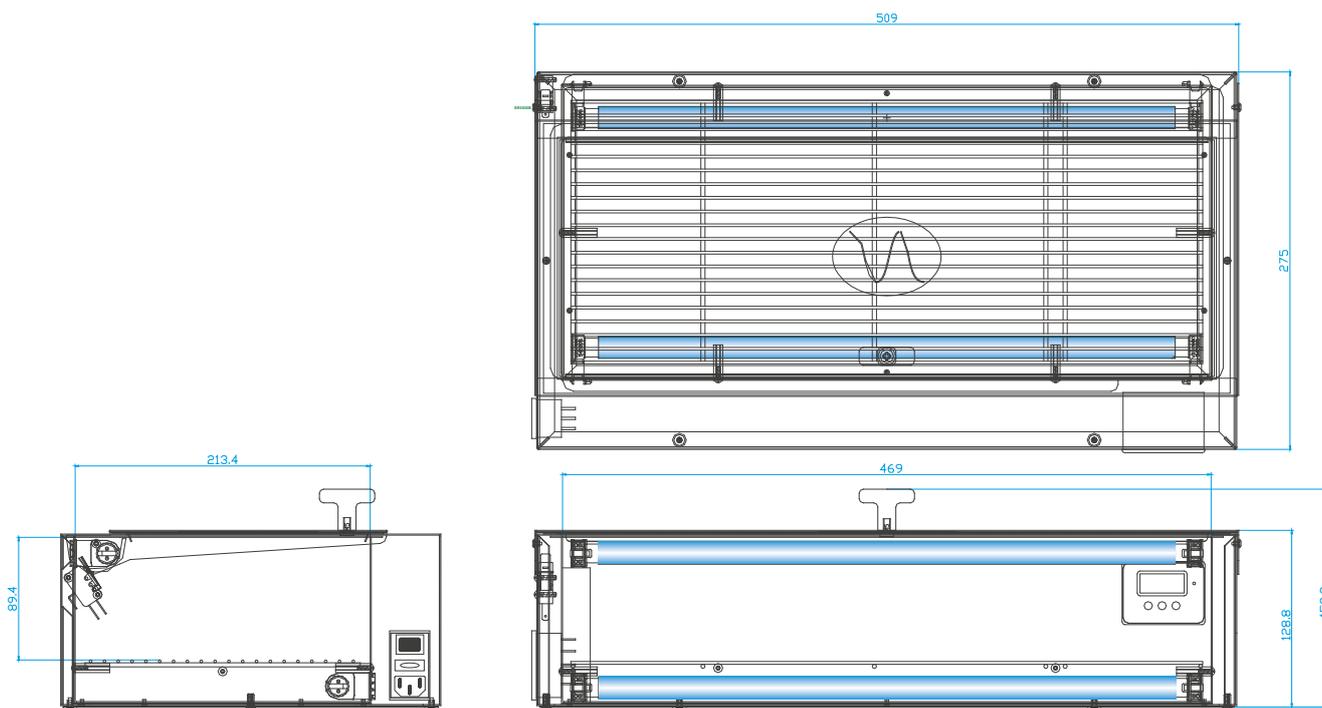


TABLE - Tabelle

UV BOX E		2/40H-NX-T
LAMP LIFETIME (hour)*	STRAHLER LEBENSDAUER (STD)*	≤ 18.000
RECOMMENDED REPLACEMENT	EMPFOHLENER WECHSEL	(Maximum Every 2 Years) (Max Ogni 2 Anni)
TOTAL CONSUMPTION (W)	STROMVERBRAUCH (W)	80
EXTERNAL DIMENSIONS HxLxP (mm)	ÄUSSERE ABMASSE HxLxP (mm)	129 x 509 x 275
INTERNAL DIMENSIONS HXLXP (MM)	INNERE ABMASSE HxLxP (mm)	89 x 469 x 213
WEIGHT (Kg)	GEWICHT (Kg)	5.5
INOX SHELVES	INOX-SCHRÄNKE	1
PROTECTION RATING	SCHUTZGRAD	IP 20
REPLACEMENT LAMP	ERSTAZ STRAHLER	n°2 CHS-40WH

* continuous operation/ununterbrochener Strahlerbetrieb

TECHNICAL DRAWINGS - Technische Zeichnungen



INSTALLATION - Installation

UV-BOX-E2/40H-NX-T is a compact desktop unit. After placing it in position, insert the plug.

- 1) Switch on the unit via the ON/OFF switch on the left side (with green indicator light).
- 2) Set the desired switch-on time using the digital timer (see picture 1).
- 3) When the lid is closed, the UV-C lamps will turn on, the correct operation will be visible by the wave-shaped cut made on the lid (see picture 2)
- 4) In any case, when the cover is opened, the lamps will be switched off for the operator's safety.

Die UV-BOX-E2/40H-NX-T ist ein kompaktes Tischgerät. Stecken Sie den Stecker ein, nachdem Sie es in Position gebracht haben.

- 1) Schalten Sie das Gerät über den ON/OFF-Schalter auf der linken Seite ein (mit grüner Kontrollleuchte).
- 2) Stellen Sie die gewünschte Einschaltzeit mit Hilfe des digitalen Timers ein (siehe Abbildung 1).
- 3) Beim Schließen des Deckels schalten sich die UV-C-Lampen ein, der korrekte Betrieb ist an dem wellenförmigen Schnitt auf dem Deckel zu erkennen (siehe Abbildung 2)
- 4) Beim Öffnen des Deckels werden die Lampen zur Sicherheit des Bedieners in jedem Fall ausgeschaltet.

