



## THE ULTIMATE SOLUTION FOR HVAC


Flange models can be installed externally to the air duct, eliminating the need for operating inside the duct during installation, maintenance, and lamp replacement. They are also well-suited for **retrofitting old AHUs**, which are typically challenging to maintain.

**Embedded power supply and Control Panel**, with Electronic Ballast Synoptic LED for every single lamp, Overall Faulty alarm, Digital hour-counter to check lamps residual lifetime, with visual alarm and signal for lamp replacement.



## KEY PRODUCT FEATURES

- **One for All**, these modules can fit easily in many different ductwork sizes and include integrated power supplies. Connect and disinfect.
- **Increased Disinfection Performance**, with a High-Output UV-C lamp (253,7 nm) enclosed in a Quartz Sleeve, to increase disinfection performances and protect the lamp from temperatures fluctuations.
- **Built to Last**, in high-quality Stainless Steel AISI 304, all material tested for UV resistance.
- **Protected**, resistant to dust and splashes with an IP55 Rating.
- **Integrate and Monitor**, your operation with visual lamp failure alarm signals, hour counter, and lamp replacement alert.

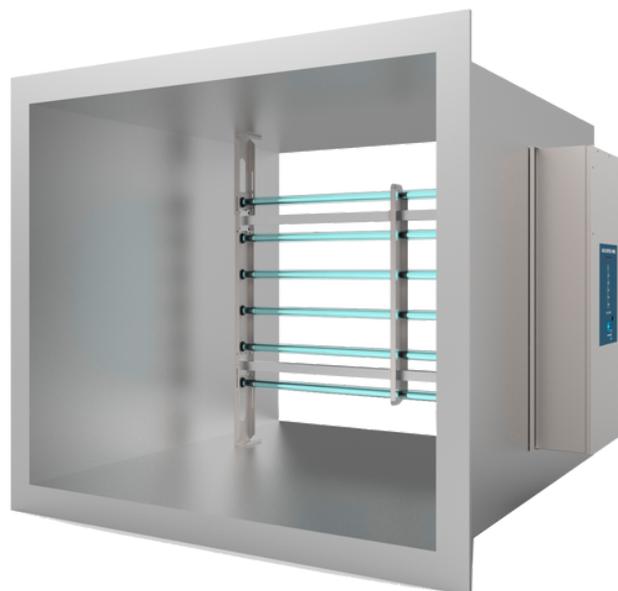

Healthcare sector  
(hospitals - clinics)



HVAC -  
Air conditioning systems



Food and pharmaceutical  
production industry



Ho.Re.Ca.



Schools -  
Offices - Shops



Large environments



Gyms -  
Wellness centres



Transport

# TECHNICAL TABLE

UV-RACK						
	UVRACK 3/40HCS	UVRACK 4/40HCS	UVRACK 6/40HCS	UVRACK 3/60HCS	UVRACK 4/60HCS	UVRACK 6/60HCS
LAMP LIFE (hours)*	≤ 18.000					
REPLACEMENT LAMP	N° 3 GH4-40WH	N° 4 GH4-40WH	N° 6 GH4-40WH	N° 3 GH6-60W	N° 4 GH6-60W	N° 6 GH6-60W
LAMP POWER (W)	120	160	240	180	240	360
DIMENSIONS	558 x 514 x 352 mm (22 x 20 x 14 in)	558 x 362 x 452 mm (22 x 14 x 18 in)	558 x 362 x 652 mm (22 x 14 x 18 in)	702 x 514 x 352 mm (22 x 20 x 14 in)	702 x 362 x 452 mm (22 x 14 x 18 in)	702 x 362 x 652 mm (22 x 14 x 18 in)
WEIGHT	8 Kg 18 Lb	9,5 Kg 21 Lb	13 Kg 29 Lb	8,5 Kg 19 Lb	10 Kg 22 Lb	14 Kg 31 Lb
	UVRACK 3/90HCS	UVRACK 4/90HCS	UVRACK 6/90HCS	UVRACK 3/120HCS	UVRACK 4/120HCS	UVRACK 6/120HCS
LAMP LIFE (hours)*	≤ 18.000					
REPLACEMENT LAMP	N° 3 GH9-90WH	N° 4 GH9-90WH	N° 6 GH9-90WH	N° 3 GH11-120WH	N° 4 GH11-120WH	N° 6 GH11-120WH
LAMP POWER (W)	270	360	540	360	480	720
DIMENSIONS	1012 x 462 x 352 mm (40 x 18 x 14 in)	1012x 362 x 452 mm (40 x 14 x 18 in)	1012 x 362 x 652 mm (40 x 14 x 26 in)	1295x 514 x 352 mm (22 x 20 x 14 in)	1295x 362 x 452 mm (22 x 14 x 18 in)	1295x 362 x 652 mm (22 x 14 x 26 in)
WEIGHT	9,5 Kg 21 Lb	11 Kg 24 Lb	15 Kg 33 Lb	10,5 Kg 23 Lb	12 Kg 26 Lb	16,5 Kg 36 Lb
PROTECTION RATING	IP 55					
POWER SUPPLY	On-board power supply always included. Optional Control Board for the management of multiple lamps (with access security, hour counter, UV lamp fault control and LED synoptic).					
SUPPLY BOX DIMENSIONS	314 x 410 x 128 mm (12 x 16 x 5 in)	314 x 410 x 128 mm (12 x 16 x 5 in)	314 x 410 x 128 mm (12 x 16 x 5 in)	314 x 410 x 128 mm (12 x 16 x 5 in)	314 x 410 x 128 mm (12 x 16 x 5 in)	314 x 410 x 128 mm (12 x 16 x 5 in)
ELECTRICAL CONNECTION	Connection cable (3 x 1,5 mm <sup>2</sup> ) NOT INCLUDED					

\* continuous operation

## TROUBLE-FREE INTEGRATION AND INSTALLATION




- We provide the optimal point of integration for every product without requiring changes to your system.
- Mounting and powering the device can be done without complex requirements.
- Ongoing maintenance only takes a few minutes to replace lamps when necessary.

## TECHNICAL DRAWINGS

Every Light Progress Product is available in detailed DWG and STEP files for your design-in and specification clarity.



## MICROBIAL TESTS AND EFFICACY

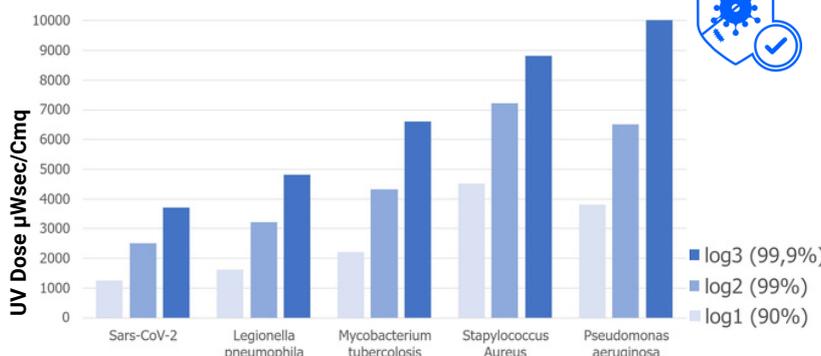

**Up-to log3 microbial reduction on Airflow, Coils and HVAC surfaces, 24 hours a day.**

Light Progress customers rely on our extensive history of third party testing and proven efficacy to meet any level of disinfection validated against literally any virus or microorganism.

We understand your need to meet Regulatory Requirements and Industrial Standards as we help you achieve microbial load reduction using our UV systems.

**Light Progress Group SRL**  
Anghiari (AR) ITALIA  
P: (+39) 0575 749255  
E: info@lightprogress.it  
W: www.lightprogress.it

**Light Progress GmbH**  
Aschaffenburg DEUTSCHLAND  
P: (+49) 6021-8663700  
E: info@lightprogress.it  
W: www.lightprogress.de

**Light Progress LLC**  
Austin, TX USA  
P: (+1) 833-882-4255  
E: americas@lightprogress.it  
W: www.lightprogress.us

**OFFICIALLY DISTRIBUTED BY:**