



POWER UP DISINFECTION, EVERYWHERE.

UV-STICK-NX-ST is a dual lamp germicidal device with a secure stand and four wheels for easy mobility.

It emits 360 degrees of direct UV to **treat both air and surfaces in the target environment.**

Operated through a dedicated control unit, equipped with two timers to manage ignition delay and treatment duration.



KEY PRODUCT FEATURES

- **Portable Disinfection;** two lamps, four wheels, two timers, and one power cable ready for you to connect and disinfect.
- **Optimized Performance,** with Light Progress High-Output UV-C lamps (253,7 nm) and internal mirror bright aluminum reflector.
- **Built to Last,** with high-quality UV-Safe materials and robust protection grids, body, and wheels.erial tested to resist UV.
- Trusted Durability, **IP55 Rating** and **UVLON™ shatterproof protective sleeve always included** to prevent glass dispersion in case of lamp accidental breakage.
- **Simple to Use,** 2 timers manage switching ON, delays and treatment duration.
- **Easy to Maintain,** the built-in hour counter let's you know exactly when to replace lamps. No other maintenance is required.



HEALTHCARE



HVAC



PROCESS
INDUSTRY



HOSPITALITY



SHARED
SPACES



PUBLIC
VENUES



WELLNESS
CENTRES



TRANSPORT

TECHNICAL TABLE

UV-STICK-2/75H-ST-NX-NT

REPLACEMENT LAMP	n°2 CHS-90WHF-P
POWER CONSUMPTION (W)	150 (2x75)
DIMENSIONS (WxHxD)	mm 404 x 1420 x 336 (in 15.90 x 55.90 x 13.22)
WEIGHT	kg 7 (lb 15.43)
TREATED VOLUME	m³ 50 ÷ 100 (ft³ 1765.73 ÷ 3531.46)
TREATED SURFACE	m² 15 ÷ 30 (ft² 161.46 ÷ 322.92)
FOR ALL MODELS	
LAMP LIFE (hours)*	≤ 18.000
PROTECTION RATING	IP 20
OP. TEMPERATURE**	MIN. -15°C ÷ MAX. +40°C (MIN. 5.0°F ÷ MAX. +104.0°F)
OP. RELATIVE HUMIDITY**	From 20 to max. 90%
V AC FREQUENCY	230 or 110 VAC 50/60 Hz
POWER SUPPLY	On-board power supply always included.
ELECTRICAL CONNECTION	Power supply cable (3x1mm²) length 2m, with IEC socket and plug (SCHUKO/others)

* Useful life can be substantially reduced by several environmental or technical factors

** Outside of these ranges, performance may not be optimal

TROUBLE-FREE INTEGRATION AND INSTALLATION



- Two timers: One to set a delay and ensure the room is free of people. Another to set the time of the disinfection cycle.
- Mounting and powering the device can be done without complex requirements.
- Ongoing maintenance only takes a few minutes to replace lamps when necessary.

SOFTWARE ENGINEERED DISINFECTION

From our in-depth know-how on the subject and with our proprietary dosage calculation software we can simulate device performance and validate effectiveness in every application.

Calculation Software




TECHNICAL DRAWINGS

Every Light Progress Product is available in detailed DWG and STEP files for your design-in and specification clarity.

VIEW or DOWNLOAD now



MICROBIAL TESTS AND EFFICACY

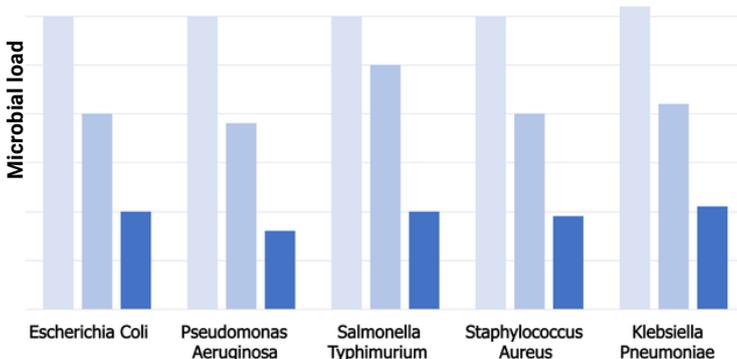

Up-to log6 microbial reduction with a 10 minutes treatment, at 3.5 mt from target Surface

Light Progress customers rely on our extensive history of third party testing and proven efficacy to meet any level of disinfection validated against literally any virus or microorganism.

- 4 min.
- 7 min.
- 10 min.

We understand your need to meet Regulatory Requirements and Industrial Standards as we help you achieve microbial load reduction using our UV systems.

Light Progress Group SRL
Anghiari (AR)
ITALIA
P: (+39) 0575 749255
E: info@lightprogress.it
W: www.lightprogress.it

Light Progress GmbH
Aschaffenburg (BY)
DEUTSCHLAND
P: +49 176 761 42327
E: info@lightprogress.it
W: www.lightprogress.de

Light Progress LLC
Dallas, (TX)
USA
P: (+1) 833-882-4255
E: americas@lightprogress.it
W: www.lightprogress.us

OFFICIALLY DISTRIBUTED BY: