

UV-TEAM-A

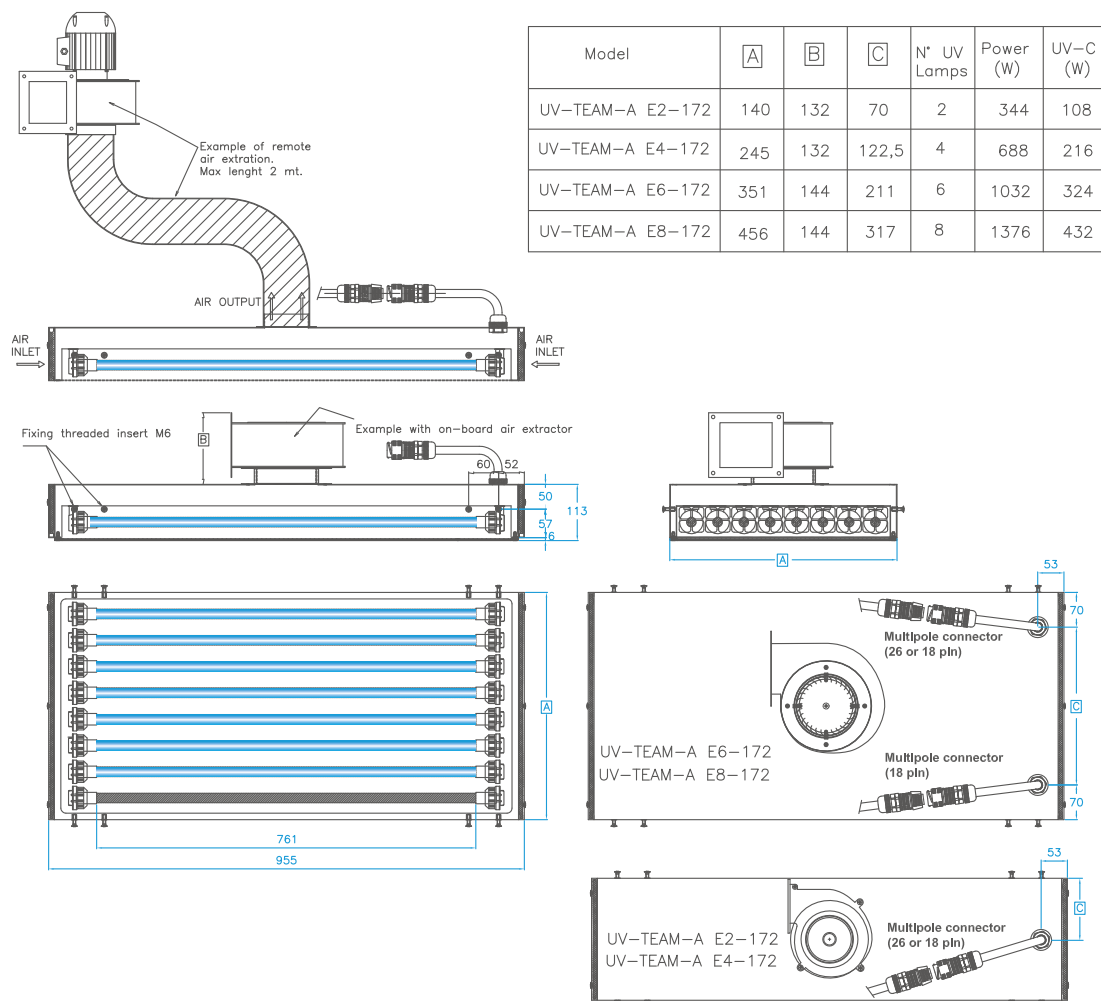




TABLE - Tabella





UV-TEAM-A		E2/172-F	E4/172-F	E6/172-F	E8/172-F	E 2/172-F-SE(SD)	E 4/172-F-SE(SD)
DURATION (hours)	DURATA (ore)	≤18.000	≤18.000	≤18.000	≤18.000	≤18.000	≤18.000
TOTAL CONSUMPTION(W)	CONSUMO TOTALE (W)	370	720	1.100	1.450	370	720
DIMENSIONS l x p x h (mm)	DIMENSIONI l x p x h (mm)	955x 140 x 113(+132)	955x 245 x 113(+132)	955x 351 x 113(+144)	955x 456 x 113(+144)	977x 250(400) x 127(+132)	977x 359(609) x 127(+132)
PROTECTION RATING	GRADO DI PROTEZIONE	IP 55					
REPLACEMENT LAMP	LAMPADA UV DI RICAMBIO	N°2 GHA-172W	N°4 GHA-172W	N°6 GHA-172W	N°8 GHA-172W	N°2 GHA-172W	N°4 GHA-172W

* continuous operation/accensione continuativa

TECHNICAL DRAWINGS - Disegni tecnici



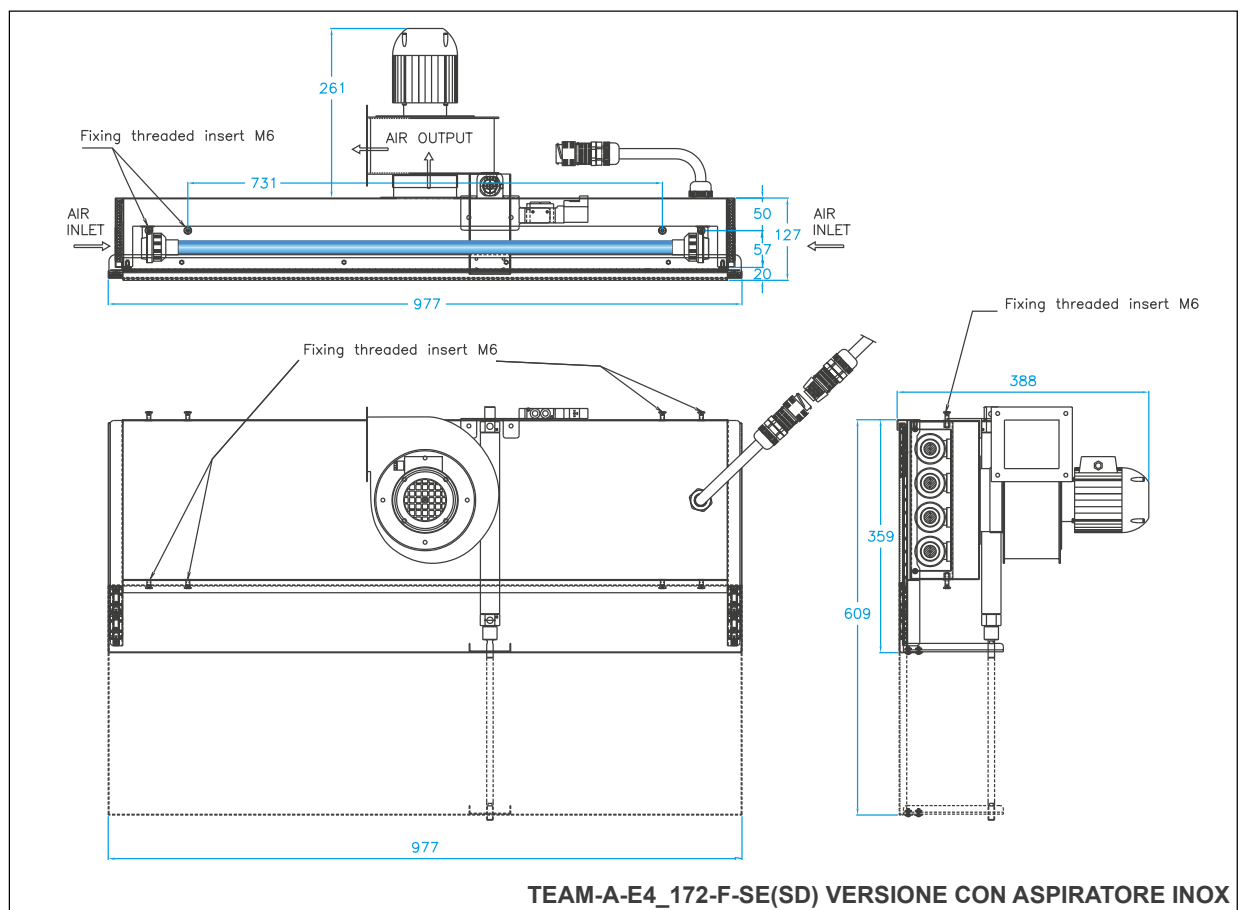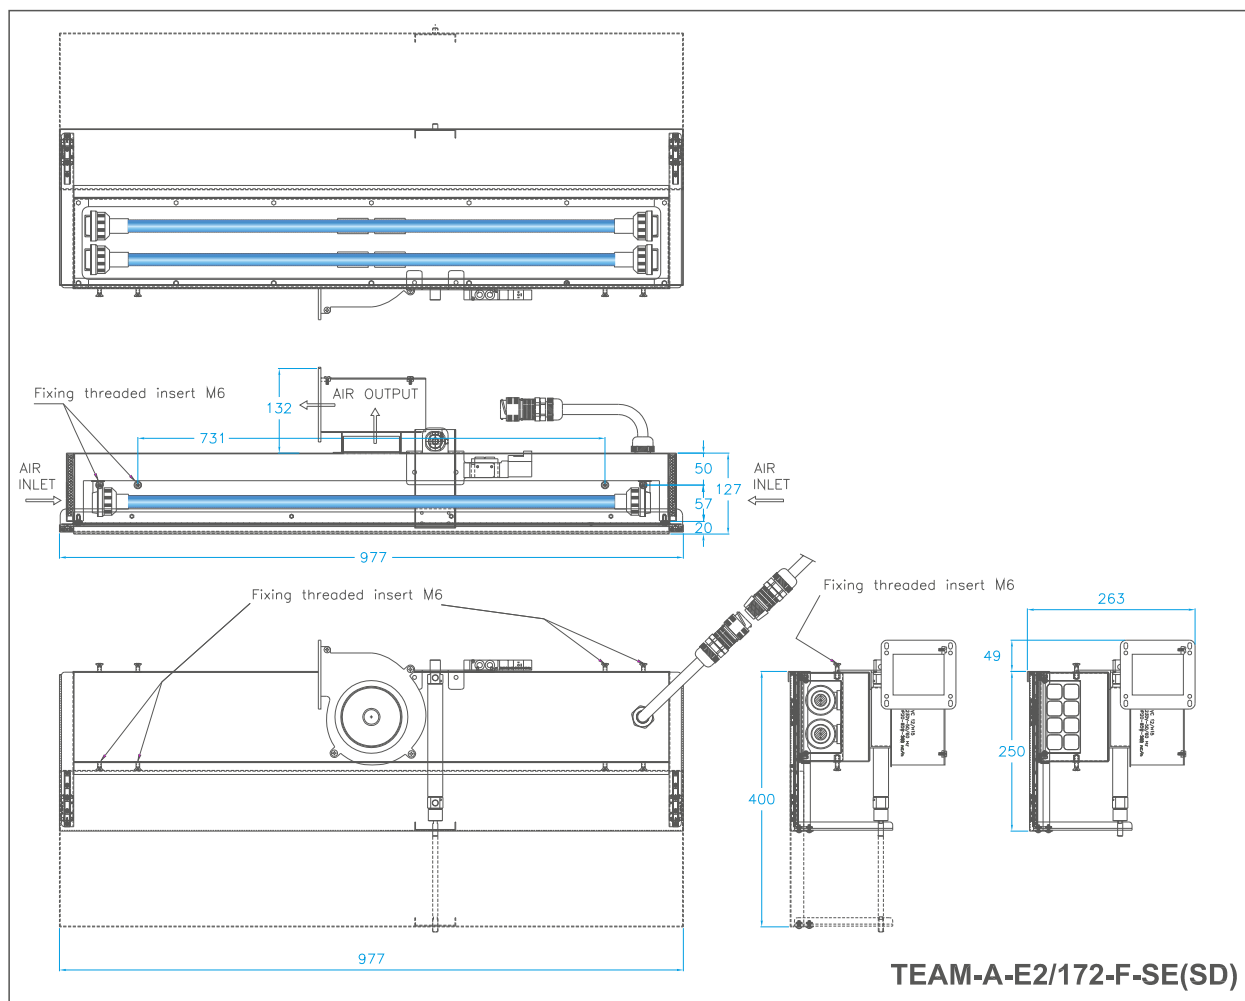

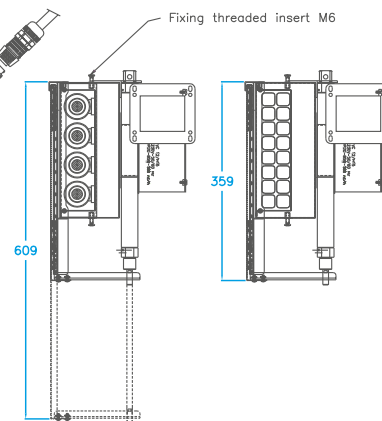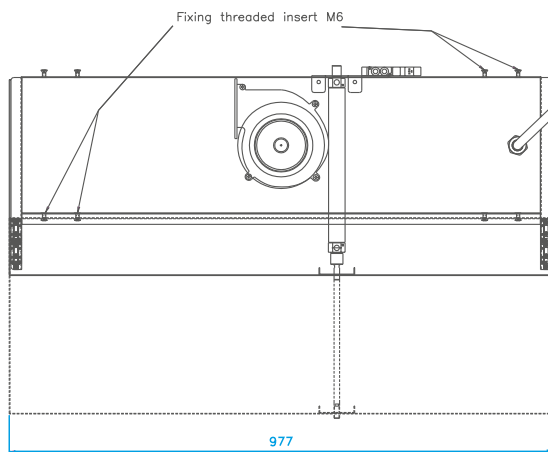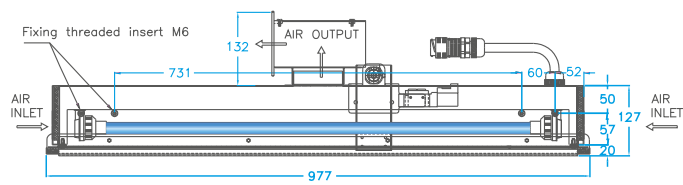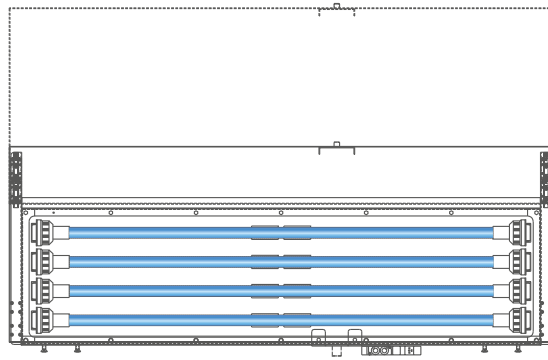

TEAM-A-E4/172-F-SE(SD)

INSTALLATION - Installazione

This model includes a stainless steel AISI 304 box, open in one side, inside the box you can find from 1 to 10 UV-C lamps, high output, helped from a mirror bright aluminum surface.

UV TEAM-A modules work with a direct irradiation of the objects and they can be installed on belts, packaging lines, usually in the final part, right before packaging. These modules need a control and power control (MASTER series). The connection between the parts is made with the multipolar cable (in dotation).

Il modulo è composto da un contenitore in acciaio inox AISI 304 con un lato aperto e all'interno della quale sono alloggiati da 1 a 10 lampade UV-C ad alta emissione coadiuvati da un riflettente in allumi-nio brillantato a specchio.

I moduli UV-TEAM-A funzionano ad irraggiamento diretto e vanno applicati sulle macchine confezionatrici, su nastri, ecc. nella fase finale del processo. Questi moduli per funzionare hanno bisogno di essere abbinati al loro corrispondente quadro di alimentazione e controllo (quadri serie MASTER). Il collegamento fra le parti viene effettuato con l'appositi cavi multipolari in dotazione.

