



UV - STYLO -X

compact UV-C system with flange


UV-STYLO-X system is very simple, versatile and adaptable to different types of applications, anywhere control is required as for hygiene level in a deep manner owing to an all-round radiation of the surfaces.

Applied inside Air Conditioning System, especially in narrow spaces UV-STYLO-X helps to improve Indoor Air Quality (IAQ) eliminating the microbial load and the spreading and distribution of hazardous and annoying pathogens inside buildings.

IAQ increases in hotels, offices, patient rooms, schools, etc. and comfort level improvement comes together with less operative costs: a cleaner Air Conditioning System is also more efficient from an economic point of view with better heating, cooling and humidification performances.

As a matter of fact, using UVGI the need of maintenance operations and manual cleaning of inner surfaces is less necessary than usual.

With UV-STYLO-X you obtain a deep and continuous disinfection and cleaning of your Air Conditioning System, without the use of expensive and polluting chemicals, in few words with UV-STYLO-X you have better comfort for people in the building, saving money.



WHAT ARE UV-C RAYS?


Light in a broad sense can be divided in visible, infra-red and ultraviolet rays.

Ultra-violet rays (invisible) can be classified in:


- UV - A (with tanning properties)
- UV - B (with therapeutic properties)
- UV - C (with germicidal properties)

The germicidal effects of the UV-C radiation destroy DNA of Bacteria, Viruses, Spores, Fungi, Moulds and Mites avoiding their growth and proliferation.

UVGI technology is a physic disinfection method with a great costs/benefits ratio, it's ecological, and, unlike chemicals, it works against every microorganisms without creating any resistance.

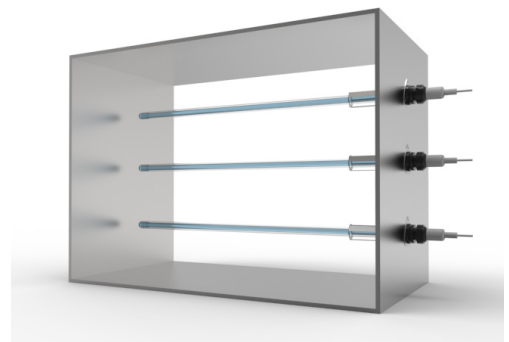

Duct application

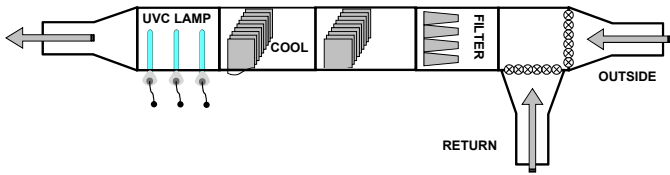

Air Conditioning Duct

TECHNICAL FEATURES

- Selective UV-C Light Progress lamp (emission peak at 253.7 nm.) high efficiency, ozone free, pure quartz.
- Frame in STAINLESS STEEL AISI 304
- All materials are tested for resistance to intense UV-C rays.
- Powered by electronic ballasts specific for Light Progress UV-C rays lamps.
- UVLON PIPE sleeve (optional).
- CE mark (LVD - EMC - MD - RoHS).

UV - STYLO - X

small system, great result



FANCOIL application

UV-STYLO-X serie includes a choice of different models designed for the application in very narrow spaces.

The device consists of a frame in stainless steel AISI 304 in which is housed a UV-C lamp protected by a pure quartz sleeve.

Quartz sleeve has the dual function of protecting the UV-C lamp by temperatures changes, creating a sort of air buffer that optimizes the performance of UV-STYLO-X.

The power supply cable comes out from the other end, plugs are quick-connection.

The system is IP40 protection.

Ballasts are specific for Light Progress UV-C lamps, optimizing their performance and durability.

UV-STYLO-X is made with high quality and extremely durable components, and works perfectly in difficult operating conditions (high humidity, low temperature, etc.).